



LIBERTY KENWORTH - SOUTHERN NEW JERSEY (L140)  
 2160 RT. 322  
 SWEDESBORO, New Jersey 08085

LIQUID MEASUREMENT & CONTROLS  
 126 INDUSTRIAL PARKWAY  
 POTTSTOWN, Pennsylvania 19464  
 United States of America

Ryan Fleck  
 Cell Phone: (484)429-0716  
 Office Phone: 856-778-1738  
 Email: rfleck@libertykenworth.com

Gabe Frezzo  
 Cell Phone: 610-613-0938  
 Email: gfrezzo@lmnc.net

## Vehicle Summary

	<b>Unit</b>		<b>Chassis</b>	
Model:	T380 Series Conventional	Fr Axle Load (lbs):		12000
Type:	FULL TRUCK	Rr Axle Load (lbs):		21000
Description 1:	33K GVW 120 IN CA	G.C.W. (lbs):		33000
Description 2:	T380 Series Conventional			
	<b>Application</b>	Road Conditions:		
Intended Serv.:	Local Pickup & Delivery: Vehicles which	Class A (Highway)		90
Commodity:	Liquid Petroleum Products	Class B (Hwy/Mtn)		10
	<b>Body</b>	Class C (Off-Hwy)		0
Type:	Tank	Class D (Off-Road)		0
Length (ft):	16	Maximum Grade:		6
Height (ft):	12	Wheelbase (in):		188
Max Laden Weight (lbs):	4000	Overhang (in):		100
		Fr Axle to BOC (in):		67.5
		Cab to Axle (in):		120.5
	<b>Trailer</b>	Cab to EOF (in):		220.5
No. of Trailer Axles:	0	Overall Comb. Length (in):		328
Type:				
Length (ft):	0	<b>Special Req.</b>		
Height (ft):	0	U.S. Domestic Registry, 50-state.		
Kingpin Inset (in):	0			
Corner Radius (in):	0			
	<b>Restrictions</b>			
Length (ft):	75			
Width (in):	102			
Height (ft):	13.5			

Approved by: \_\_\_\_\_

Date: \_\_\_\_\_

Note: All sales are F.O.B. designated plant of manufacture.

Sales Code	Std/Opt	Description	\$ List	Weight
<b>Model</b>				
0000380	S	<b>T380 Series Conventional</b>	107,796	<b>9,930</b>
0070086	S	<b>T380 Aero Hood</b>	0	<b>0</b>
0080314	O	<b>EPA Clean Idle Label - PACCAR PX Engines</b>	36	<b>0</b>
0090143	O	<b>T380 Automatic</b>	0	<b>0</b>
0098430	O	<b>State of Registry: New Jersey</b>	0	<b>0</b>
<b>Engine &amp; Equipment</b>				
0130219	O	<b>PACCAR PX-9 300 300@1850 860@1200, 2024</b> With Turbo Exhaust Brake (VGT Brake) N09420 C333 0.....Reserve Speed Limit Offset ( N09380 C334 0.....Maximum Cycle Distance (N202 N09360 C400 252...Reserve Speed Function Reset N09200 C399 120...Standard Maximum Speed Limit N09400 C401 10...Maximum Active Distance (N20 N09220 C402 0.....Expiration Distance (N207) N09540 C395 0.....Expiration Distance (N209) N09260 C121 70...Max Vehicle Speed in Top Gea N09440 C234 NO....Engine Protection Shtdwn N09460 C231 NO....Gear Down Protection N09580 C133 5.....Idle Shtdwn Time N09680 C233 NO....Idle Shtdwn Override N09480 C132 1400..Max PTO Speed N09300 C128 70...Max Cruise Control Speed N09500 C239 NO....Cruise Control Auto Resume N09520 C238 NO....Auto Engine Brake in Cruise N09780 C190 80....High Ambient Temperature Thr N09740 C188 40....Low Ambient Temperature Thre N09760 C189 60....Intermediate Ambient Tempera N09720 C382 YES...Enable Hot Ambient Automatic N09600 C396 YES...Enable Impending Shutdown Wa N09620 C397 60....Timer For Impending Shutdown N09640 C206 35....Engine Load Threshold N09560 C225 YES...Enable Idle Shutdown Park Br	9,633	<b>694</b>
1000046	O	<b>EPA Emissions Warranty Engine</b>	0	<b>0</b>
1000122	U	<b>2024 SERIES EMISSIONS ENGINE</b> <i>Narr 2024 SERIES EMISSIONS ENGINE</i>	0	<b>0</b>
1000151	S	<b>PremierSpec</b>	0	<b>0</b>
1000244	O	<b>Gearing Analysis: Balance</b> power/economy blend results.	0	<b>0</b>
1000254	O	<b>Customer's Typical Operating Spd: 65 MPH</b>	0	<b>0</b>

Sales Code	Std/ Opt	Description	\$ List	Weight
1000524		<b>RegistrationYear</b> Year of Registration: 2024	0	0
1000684	O	<b>Effective VSL Setting NA</b>	0	0
1000858	O	<b>Engine Idle Shutdown Timer Disabled</b>	0	0
1000859	O	<b>Enable EIST Ambient Temp Overrule</b>	0	0
1000891	O	<b>Eff EIST NA Expiration Miles</b> Use only with MX and Cummins engines	0	0
1002060	S	<b>Air Compressor: Cummins 18.7 CFM For Cummins And PACCAR PX engines.</b>	0	0
1041399	S	<b>Air Cleaner: MD Composite Engine Mounted</b>	0	0
1105232	O	<b>Fan Hub: Horton Variable Speed</b> For use with PX engines, L9N or B6.7N natural gas engines on 2.1M only.	615	0
1121231	S	<b>Cooling Module: 2.1M MD - Aero Hood</b> 1000 Square Inches	0	0
1247263	O	<b>EXH: Single Can 2024 RH Under with RH</b> Side-of-Cab Vertical Tailpipe	2,941	0
1290130	O	<b>Tailpipe: 5 in. single 30 in. 45 degree curved.</b>	188	12
1321102	S	<b>Fuel Filter: PACCAR 2.1M MD for PX-7 or PX-9</b> Fuel/water separator for 2021 and later engines.	0	0
1321205	O	<b>Run Aid:Fuel Heat</b> *For Fuel Filter	41	0
1321305	O	<b>Start Aid:12V Heat</b> *For Fuel Filter	22	1
1504006	O	<b>Block Heater: PACCAR 750 watt 120V for PX-7 and B6.7N. 1000 watt for PX-9 and ISL9 Engines.</b>	26	2
1816260	S	<b>Alternator: PACCAR 160 amp, Brush Type</b>	0	0
1821210	O	<b>Batteries: 3 PACCAR GP31 Threaded Post (700-730)</b> 2100-2190 CCA dual purpose.	182	62
1836106	O	<b>Mitsubishi 105P55 12V Starter with Cummins and PX</b> PACCAR 12 volt electrical system. W/ centralized power distribution incorporating plug-in style relays. Circuit protection for serviceability, 12-volt light system w/circuit protection circuits number & color coded. Only for Cummins or PX engines.	39	0
1840065	S	<b>12V Low Voltage Disconnect for Battery Protection</b>	0	0
1840067	O	<b>Battery Disconnect Switch Mounted on Battery Box</b> Provides One (1) Switch	395	0
1900996	O	<b>Jump Start Terminals Under Hood.</b>	71	0
1901017	O	<b>Remote PTO/Throttle, 12-Pin, Engine Bay</b> Remote Control Provision	34	0

Sales Code	Std/ Opt	Description	\$ List	Weight
<b>Transmission &amp; Clutch</b>				
2011613	O	<b>Transmission: Allison 3000RDS 6-speed, With PTO</b> drive gear. 6th Generation controls. Includes heat exchanger & oil level sensor. Rugged Duty Series for vocational applications. Requires a push button shift control code. Oil temperature gauge is standard on class 8 models. Transynd transmission fluid is standard on all Allison 1000, 2000, 3000 & 4000 series transmissions.	10,112	399
2401405	O	<b>Driveline: 2 Dana Standard-Duty; 1 Centerbearing.</b> *Standard duty is 1710 series.	259	67
2409941	O	<b>One Heavy-Duty One-Piece Aluminum Crossmember</b> This option upgrades an existing crossmember. The cost does not include the centerbearing and bracket. Crossmember location will be in accordance with Kenworth engineering standards, using the major components specified on the DTPO.	149	0
2410018	O	<b>Torque Converter Included W/ Allison</b> Transmission.	0	0
2410114	O	<b>Left Hand PTO Access, Right Hand Dip Stick Tube</b> Allison 3000 series only.	42	0
2410153	O	<b>Push Button Shifter Controls, Center Console</b> Mounted for Allison Transmission. 2.1m Medium Duty only.	0	0
2410204	O	<b>Allison Fuel Sense: Delete</b>	0	0
2410244	O	<b>J1939 Park Brake Auto Neutral</b>	0	0
2410310	O	<b>Allison Neutral at Stop</b>	0	0
2429358	O	<b>Rear Transmission Support Springs for</b> transmission PTO applications are required to ensure that engine flywheel housings are not overloaded when transmission PTO's are installed.	93	0
2429378	O	<b>Customer Installed Transmission PTO in the LH</b> Mounted position (8 o'clock) for Allison 3000 & 4000 transmissions.	0	0
<b>Front Axle &amp; Equipment</b>				
2502230	O	<b>Dana Spicer E-1202IL Front Axle rated 12K</b> 3-1/2in. drop. Use W/Air Brakes Only. Medium Duty Only.	43	0
2621310	S	<b>Front Brakes: 14.6K Bendix ES S-Cam 16.5x5 in.</b>	0	0
2690002	S	<b>Front Brake Drums: 14.6K 16.5x5 in. cast.</b>	0	0
2702500	S	<b>Front Hub: Iron Hub Pilot 14,600 lbs.</b> 11-1/4 in. bolt circle. For use w/ air disc brakes. Consider wheelguards (5850002) w/ aluminum wheels.	0	0
2741970	S	<b>ConMet PreSet Plus Hub Package; Front Axle.</b>	0	0
2750001	S	<b>Hubcap: Front Vented.</b>	0	0
2765001	S	<b>Front Auto Slack Adjuster for Drum Brakes.</b>	0	0

Sales Code	Std/ Opt	Description	\$ List	Weight
2864070	O	<b>Front Springs: Taperleaf 13.2K W/ Shock Absorbers</b> w/ maintenance-free elastomer spring pin bushings.	437	111
2895223	S	<b>Single Power Steering Gear: 13.2K for Air Brakes.</b>	0	0
2900055	O	<b>5 mm Front Suspension Spacer Block</b>	0	0
2900612	O	<b>Threaded Front Spring Bushings in Place of elastomeric.</b>	62	0
<b>Rear Axle &amp; Equipment</b>				
3031181	O	<b>Single Dana Spicer S21-172 Single Reduction Rear axle.</b> Single rear axle rated at 21K.	707	102
3200525	O	<b>Rear Axle Ratio - 5.25.</b>	0	0
3330004	S	<b>Single Rear Brakes 16-1/2x7 in. Bendix ES-</b> extended service S-cam.	0	0
3392007	S	<b>Single Rear Brake Drums: Cast S-Cam Single</b> For use with 15x8.625", 16.5X7" or 16.5X8.625" brake.	0	0
3403220	S	<b>Single Rear Hubs: Iron Hub Pilot 26k; 11.25" Bolt circle.</b> Requires "R" series outer ends.	0	0
3441971	S	<b>ConMet PreSet Plus Hub Package; Single Rear Axle.</b>	0	0
3465001	S	<b>Single Rear Axle Automatic Slack Adjusters.</b> For use with drum brakes.	0	0
3485214	O	<b>Spring Brake: 3036 Long Stroke Single 30 Square inches;</b> 36 square inches spring chamber. For drum brakes	90	0
3495226	S	<b>Bendix 4S/4M Anti-Lock Brake System.</b>	0	0
3531001	O	<b>Wheel Differential Lock for Dana Spicer Axles</b> S21-170/172, S21-190, S23-170/172, S23-190, S26-190 & S30-190; adds D to the end of the axle part number.	929	28
3636422	O	<b>Rear suspension: single Reyco 79KB taperleaf 23K</b> with helper spring. Medium-duty. Unladen Height: 9 in. Laden Height: 7.3 in. Not rear air disc brake compatible.	253	58
3836310	O	<b>Rear Shock Absorbers for Reyco 79KB.</b>	231	35
3836315	O	<b>Bolted Rear Suspension Crossmembers for Reyco 79KB.</b> Replaces medium duty standard.	320	41
<b>Tires &amp; Wheels</b>				
4010137	O	<b>Front Tires: Michelin X Line Energy Z 11R22.5 16P</b>	458	-1
4238866	O	<b>Rear tires: Goodyear Endurance LHD 11R22.5 16PR</b>	1,306	80
4900004	O	<b>Rear Tire Quantity: 4</b>	0	0
5043550	O	<b>Front Wheel: Alcoa ULA18 22.5x8.25 MagnaForce</b> aluminum alloy, hub-pilot mount. 7400lb maximum rating. Air Disc Brake compatible. High polish.	407	-51

Sales Code	Std/Opt	Description	\$ List	Weight
5243550	O	<b>Rear Wheel: Alcoa ULA18 22.5x8.25 MagnaForce</b> aluminum alloy, hub-pilot mount. 7400lb maximum rating. Air Disc Brake compatible. High polish.	814	-102
5900004	O	<b>Rear Wheel/Rim Quantity: 4</b>	0	0
<b>Frame &amp; Equipment</b>				
6054410	O	<b>Frame Rails: 10-5/8 x 3-1/2 x 5/16 in. Steel to</b> 309 in. to 380 in. Truck frame weight is 2.91 lb.-in. per pair of rails. Section modulus is 14.80 cu.in., RBM is 1,776,000 in.-lbs per rail. 120,000 PSI yield. Heat treated. Frame rail availability may be restricted based upon application, axle/suspension capacity, fifth wheel setting, or component/dimensional specifications. The results of the engineering review may result in a change to the requested frame rail. If a change is required Kenworth Application Engineering will advise the dealer of the appropriate material specification for a substitute rail.	343	229
6308715	O	<b>Bumper: Aerodynamic Chrome Requires a Bumper</b> setting code.	1,094	68
6319040	S	<b>40 in. Bumper Setting. Requires a Bumper Code.</b>	0	0
6321010	S	<b>Front Tow Loops: Two</b>	0	0
6397001	O	<b>Huck Bolts Throughout Frame, where Possible.</b>	0	0
6404421	O	<b>Battery Box: Steel Parallel Module under W/Step,</b> polished aluminum cover. Use with 2 or 3 batteries. Up to 2 air tanks may be mounted to bottom of box. Batteries will be oriented perpendicular to the frame rail in a single row.	408	9
6409901	O	<b>Battery Box Location: LH Side.</b>	0	0
6451125	O	<b>DPF/SCR Box Natural End Plates and Natural</b> cover.	0	0
6490139	O	<b>Heavy-Duty One-PC Aluminum Intermediate/ Fill-In</b> crossmember.	231	13
6490434	O	<b>Heavy-Duty 5-Piece Rear Cab Support, Bolted</b> assembly. Huck fastened to frame.	57	15
6742009	S	<b>Square End-of-Frame W/O Crossmember; Non-Towing.</b>	0	0
<b>Fuel Tanks &amp; Equip</b>				
7144060	O	<b>60 US Gallon D-Shape Rectangular Aluminum BOC</b> fuel tank, replace.	-41	-21
7722170	S	<b>Small DEF Tank, 5.5 Gallons.</b>	0	0
7840015	O	<b>Polish Only One Aluminum Tank.</b>	142	0
7840038	O	<b>Polished Cover for 1 DEF Tank Any Size.</b>	241	3
7889007	O	<b>Fuel Fill: Center of Tank(s) BOC. Not</b>	0	0

Sales Code	Std/ Opt	Description	\$ List	Weight
		available on fuel tanks with 3 supports or with full or partial chassis fairings.		
7889061	O	<b>Polished Stainless Steel Tank Straps for 1 Tank.</b>	95	0
7889206	O	<b>Minimum Required DEF to Fuel Fill Ratio.</b>	0	0
7889217	O	<b>DEF capacity ratio - Truck to be centrally fueled</b>	0	0
7889614	O	<b>DEF Tank Location is LH BOC. For 2.1M Medium-Duty</b>	0	0
7940060	O	<b>Location: 60 gal fuel tank LH behind cab</b>	0	0
<b>Cab &amp; Equipment</b>				
8024311	S	<b>Cab: Stamped Aluminum with Curved Windshield</b> LED markers. Requires seperate roof code.	0	0
8090154	O	<b>Hood: Short Aero w/ Chrome Crown</b>	107	0
8108011	S	<b>Cab HVAC - Day Cab and 40 in. Sleeper</b> System With Defrost, A/C, and 48,000 BTU/hr Heater. Includes automatic temperature control with one touch defrost operation and dash mounted cab temperature and solar intensity sensors. Pleated fresh air filter and cabin recirculation air filter standard. The Kenworth HVAC system is designed to provide optimal heating and cooling in all operating environments without need for additional insulation. Cab HVAC without sleeper heater AC is available with 40in sleeper.	0	0
8201047	O	<b>Kenworth Smartwheel: 18 in. Non-Leather With</b> Integrated Radio and Cruise Controls.	116	0
8201200	S	<b>Adjustable Telescoping Tilt Steering Column.</b>	0	0
8203060	O	<b>5 Sets of Keys. Replaces Standard 2 Sets of Keys.</b>	34	0
8205135	O	<b>Information for Customer-Installed PTO Muncie</b> 10-bolt.	0	0
8205177	O	<b>Dash Switch:1st Allison-Mounted PTO.</b> Electric switch and wiring are factory-installed to control the 1st Allison Trans mounted PTO.	167	0
8208497	O	<b>Four Spare Switches: Wired to Power.</b>	79	0
8209999	O	<b>Spare Power Wiring For Customer Installed Devices</b> Behind Dash Cluster. Includes 2 batt, 2 ign, 1 acc, 1 LVD at 20A each.	89	2
8221105	O	<b>Gauge: Air Application Gauge.</b>	46	0
8222409	O	<b>Gauge: DD Virtual Gauge - Air Filter</b> Restriction	0	0
8222413	O	<b>Gauge: DD Virtual Gauge - Manifold</b> Pressure Boost	0	0
8222414	O	<b>Gauge: DD Virtual Gauge - Engine Percent</b>	0	0

Sales Code	Std/Opt	Description	\$ List	Weight
		Torque		
8222418	O	<b>Gauge: DD Virtual Gauge - Engine Hours</b> Instrument Cluster	0	0
8222419	O	<b>Gauge: DD Virtual Gauge - Volts</b> Instrument Cluster	0	0
8222712	O	<b>Gauge: Fuel Filter Restriction Gauge.</b>	130	0
8226667	O	<b>Gauge: Oil Temperature Gauge Transmission.</b> The NavPlus HD unit includes a virtual transmission oil temperature gauge.	49	0
8282024	S	<b>Main Instrument Package: 7" Digital Display</b> Cluster. Includes Physical (Analog): Speedometer, Tachometer, Oil Pressure, and Coolant Temp; and Digital: Fuel Level #1, DEF Level, DPF Filter Status, Fuel Economy, Volts Telltale, OAT and Primary Air Pressure, Secondary Air Pressure, and Air Application for air brake trucks.	0	0
8330591	S	<b>Interior Trim Package: 2.1M MD Gray Foam</b> Backing/Cloth Headliner W/Gray Sunvisor & Seat Color Three Underdash Center Console Cupholders (Two If Allison Transmission Is Selected).	0	0
8410122	O	<b>Driver Seat: KW Air Seat HB Vinyl w/ Dual</b> Armrests/Susp Cover	191	0
8480232	O	<b>Rider Seat: KW Toolbox Seat HB Vinyl w/ Dual</b> Armrests/Record Holder/Occupancy Sensor	-139	0
8490161	O	<b>Seat Color: Black Replacing Standard Gray</b>	0	0
8601432	O	<b>Kenworth Radio DEA710 AM/FM/WB/USB, Bluetooth</b>	394	0
8698965	O	<b>Speaker Package For Cab: (2) Speakers</b> B-Pillar	51	0
8699933	O	<b>CB Installation Kit: C/I Center Mtd of Header w/</b> Dual Antenna on LH/RH mirrors. One Jumper Harness.	210	2
8700161	O	<b>Footwell Light: Red Lens &amp; Switch</b>	12	0
8700196	S	<b>Turn Signal: Self-Cancelling</b>	0	0
8700283	S	<b>LH and RH Trip Ledge Rain Deflectors</b>	0	0
8700663	O	<b>Kenworth TruckTech+:</b> This system provides the World's Best reporting of engine and aftertreatment fault codes, as well as enhanced support for the truck owner through rapid communication of fault severity and recommended actions. This is standard on all Kenworth models with a PACCAR MX engine, Cummins X15 engine, PX engine or Natural Gas engine.	0	0
8800260	O	<b>Long Grabhandle RH Side Mounted to Side-of-Cab</b> exhaust.	31	2



Sales Code	Std/Opt	Description	\$ List	Weight
8800372	O	<b>Grabhandle: LH, Exterior, Side of Cab - Ergonomic</b> Grab Handle Mounted To The Left Hand Exterior Of The Cab For Entry and Exit.	119	3
8800402	S	<b>Dual Cab Interior Grabhandles: A Pillar Mounted</b> Dash Wrap and B Pillar Mounted Grabhandles	0	0
8832113	S	<b>Kenworth Daylite Door With Standard LH/RH</b> electric door locks and LH/RH electric window controls.	0	0
8841642	O	<b>Air Horn: Dual Round 26" LH/RH Roof</b> Incl Air Horn Cover	251	0
8850139	S	<b>Look-Down, Pass. Door, Black 11x6</b>	0	0
8850841	O	<b>Mirror Shell: Dual Aero Chrome</b>	148	0
8860852	O	<b>Mirror: Dual KW Aero Rear View</b> Motor, heated with Integral CX	66	0
8871446	S	<b>Rear Cab Stationary Window 19in x 36in</b>	0	0
8890038	O	<b>3.5in x 11.5in Plastic Records Holder:Mounted On</b> Rear Cab Panel. Not available With Sleeper Or 2 Person Bench Seat.	52	0
8890101	S	<b>One-Piece Bonded-In Windshield With Curved Glass.</b> Standard.	0	0
8890135	O	<b>Exterior Stainless Steel Sunvisor.</b>	761	11
8890874	O	<b>Kenworth Cab Air Suspension.</b>	133	0
8891011	O	<b>Roof: Raised Profile, Stamped Aluminum w/</b> Additional Head Room & Interior Overhead Storage	160	0
<b>Lights &amp; Instruments</b>				
9010803	S	<b>Headlamps: Single Halogen Complex Reflector w/</b> Turn Indicator, Reflector and DRL. Fender Mtd.	0	0
9022137	S	<b>Marker Lights: Five, Rectangular, LED</b>	0	0
9030052	S	<b>LED Stop,Turn,Tail: With Two LED</b> Backup Lights and With An LED License Plate.	0	0
9058085	O	<b>Switch,Wire,Indicator Light: C/I Flood 1st SW</b> Thru Grommet Under Cab	129	0
9090312	O	<b>Body Builder Lighting Harness Coiled End Of Frame</b> For Additional Customer Installed Exterior Lighting. Harness Includes Circuits for Additional Customer Installed Tail Lamps, Turn Lamps, Stop Lamps, and Marker Lamps.	154	0
9090849	O	<b>Polyswitches Replacing Fuses. Switch Will</b> automatically reset after removal of excess load.	43	0
<b>Air Equipment</b>				
9101218	S	<b>Air Dryer: Bendix AD-HF Puraguard Heated</b>	0	0
9108001	S	<b>Moisture Ejection Valve W/ Pull Cable Drain.</b>	0	0

Sales Code	Std/ Opt	Description	\$ List	Weight
9140020	S	<b>Nylon Air Tubing in Frame &amp; Cab, Excluding Hoses</b> subject to excessive heat or flexing.	0	0
<b>Extended Warranty</b>				
9200008	O	<b>Base Warranty - PACCAR PX-9 Engine</b> 24 months / 250,000 miles / 402,336 km / 6250 hours.	0	0
9200022	S	<b>Base Warranty - Standard Service Medium Duty</b> 12 months / Unlimited miles & km	0	0
9212661	O	<b>TruckTech+ RD - 5YR Sub PACCAR PX Engines</b>	799	0
9220001	O	<b>Base Warranty: Emissions</b> 5YR/100K MI - EPA Engine	0	0
<b>Miscellaneous</b>				
9409852	O	<b>GHG Secondary Manufacturer: Does Not Apply</b>	0	0
9490206	O	<b>Warning Triangle Reflector Kit: Shipped Loose.</b> Kit consists of 3 triangles in plastic carrying case. Not floor mounted.	58	4
9490404	O	<b>One 5 lb. Dry Chemical Type Fire Extinguisher</b> mounted outboard of driver seat. Class ABC.	126	11
9491659	S	<b>VMUX Architecture</b>	0	0
<b>Promotions</b>				
<b>Paint</b>				
9700000	O	<b>Paint Color Number(s).</b>  N9702 A - L0006 WHITE N9720 FRAME N0001 BLACK	0	0
9943004	S	<b>Bumper Unpainted</b>	0	0
9943048	O	<b>Day Cab Bulk Paint</b>	0	0
9943050	S	<b>Day Cab Standard Paint</b>	0	0
9944820	S	<b>1 - Color Paint - Day Cab</b> Color will be White if no other color is specified.	0	0
9965510	S	<b>Base Coat/ Clear Coat.</b> The Kenworth Color Selector contains additional instructions, as well as information on Kenworth paint guidelines and surface finish applications. Kenworth is standard with Dupont Imron Elite paint.	0	0

<i>Sales Code</i>	<i>Std/ Opt</i>	<i>Description</i>	<i>\$ List</i>	<i>Weight</i>
-------------------	---------------------	--------------------	----------------	---------------

**Special Requirements**

- Special Requirement 1 0098025
- Special Requirement 2
- Special Requirement 3
- Special Requirement 4

**Order Comments**



<b>Total List Price (W/O Freight &amp; Warranty &amp; Surcharges )</b>	\$145,068
<b>Marketing and Service Support Fee</b>	\$770
<b>Prepaid Freight</b>	\$3,625
<b>Total Surcharge/Options Not Subject To Discount</b>	\$799
<b>Total Weight</b>	11,819

**Prices and Specifications Subject to Change Without Notice.**

---

Unpublished options may require review/approval.  
Dimensional and performance data for unpublished options may vary from that displayed in CRM.

---

**PRICING DISCLAIMER**


*While we make every effort to maintain the web site to preserve pricing accuracy, prices are subject to change without notice. Although the information in this price list is presented in good faith and believed to be correct at the time of printing, we make no representations or warranties as to the completeness or accuracy of this information. We reserve the right to change, delete or otherwise modify the pricing information which is represented herein without any prior notice. We carefully check pricing specifications, but occasionally errors can occur, therefore we reserve the right to change such prices without notice. We disclaim all liability for any errors or omissions in the materials. In no event will we be responsible for any damages of any nature whatsoever from the reliance upon information from these materials. Please check your order prebills to confirm your pricing information*

**Shipping Destinations**

Intermediate Destination: NONE

Final Destinations	Quantity
Liquid Measurement Controls Inc. 126 Industrial Parkway Pottstown, Pennsylvania 19464	3

## FRAME RAKE

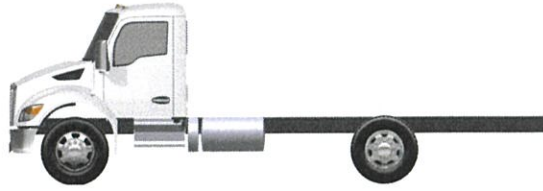


The listed heights should be considered approximations due to variations which may occur in component manufacturing processes, spring set, and the way in which the vehicle is loaded.

Component	Sales Code	Description	Laden	Unladen
Frame	6054410	Frame Rails: 10-5/8 x 3-1/2 x 5/16 in. Steel to	10.6	10.6
Front Spring	2864070	Front Springs: Taperleaf 13.2K W/ Shock Absorbers	8.1	9.2
Front Axle Drop 3.5"	2502230	Dana Spicer E-1202IL Front Axle rated 12K	0.0	0.0
Height Adj.	2900055	5 mm Front Suspension Spacer Block	0.2	0.2
Front Tires	4010137	Front Tires: Michelin X Line Energy Z 11R22.5 16P	19.1	19.7
<b>Front Frame Height</b>			<b>38.0</b>	<b>39.7</b>
Frame	6054410	Frame Rails: 10-5/8 x 3-1/2 x 5/16 in. Steel to	10.6	10.6
Subframe	0000000	No sub frame	0	0
Suspension	3636422	Rear suspension: single Reyco 79KB taperleaf 23K	7.3	9.0
Rear Tires	4238866	Rear tires: Goodyear Endurance LHD 11R22.5 16PR	19.9	20.9
<b>Rear Frame Height</b>			<b>37.8</b>	<b>40.5</b>
<b>Frame Rake</b>			<b>-0.2</b>	<b>0.8</b>
<b>Frame Rake Slope (%)</b>			<b>-0.1</b>	<b>0.4</b>

These characteristics are considered to be out of standard range: Laden rake more than 1% of wheelbase from level (positive or negative).

## HORIZONTAL DIMENSIONS

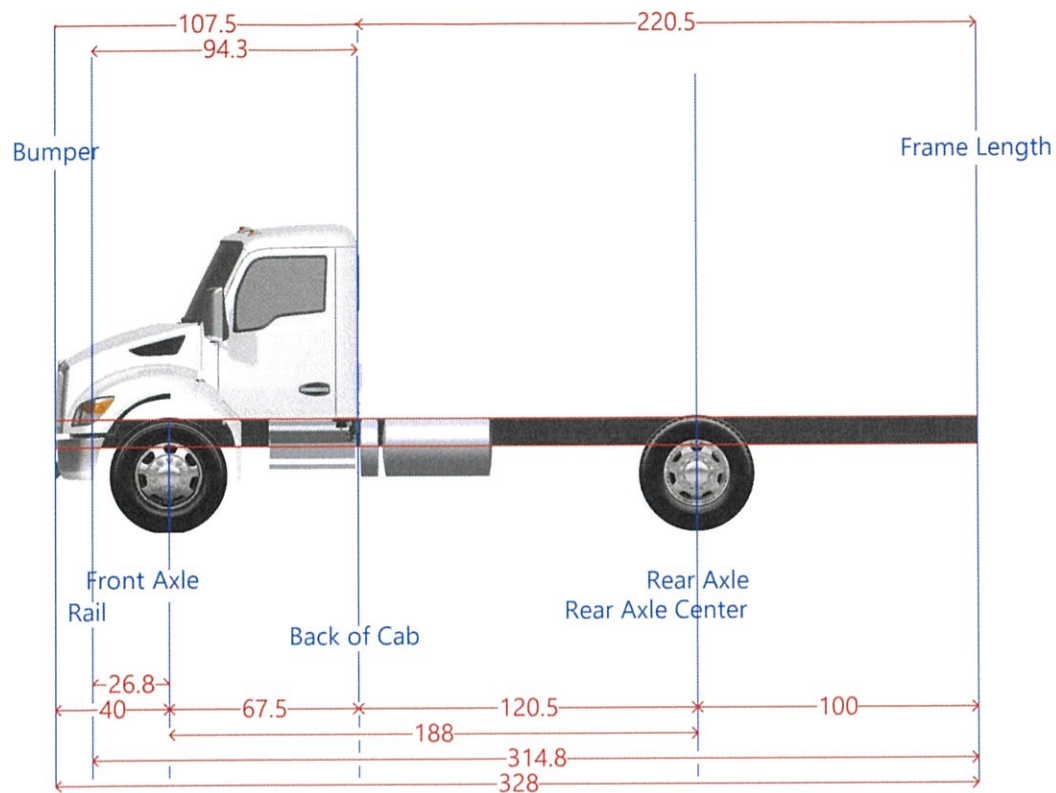


Dimension	Measurement	Start	End
Axle Spacing	0	188	188
Bumper to Back of Cab	107.5	-40	67.5
Bumper to Front Axle	40.0	-40	0
Bumper to Front Frame	13.2	-40	-26.8
Cab to End of Frame	220.5	67.5	288
Cab to Rear Axle	120.5	67.5	188
Effective Bumper to Back Of Cab	107.5	-40	67.5
Frame Length	314.8	-26.8	288
Front Axle to Back of Cab	67.5	0	67.5
Front of Frame to Axle	26.8	-26.8	0
Load Space	220.5	67.5	288
Overall Length	328.0	-40	288
Overhang	100.0	188	288
Pusher Offset #1	0.0	188	188
Pusher Offset #2	0.0	188	188
Pusher Offset #3	0.0	188	188
Tag Offset	0.0	188	188
Wheelbase	188	0	188

## WEIGHT DISTRIBUTION

Model: T380

Actual performance of a specific unit can be affected by your operating conditions. The performance calculations should only be used as a guideline.

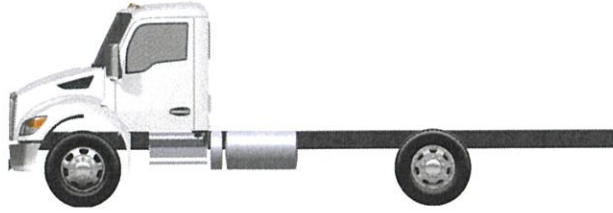

Recommended payload center of gravity to achieve specified ground loads; measured from centerline of drive axles: 37 in. from the centerline of the drive axle(s).

Weight (lbs)	Front	Rear	Total
Chassis	7434	4385	11819
Tools/Driver	275	100	375
Fuel & DEF	243	239	483
Max Payload	4048	16275	20323
Auxiliary Payload	0	0	0
Total	12000	21000	33000
Specify Ground Load	12000	21000	


### Auxiliary Payload

Item	Location from FA CL	Weight	Point Description
Load Point #1	0	0	
Load Point #2	0	0	
Load Point #3	0	0	
Component(s)	-	0	Composite Totals

Fifth wheel slide length is 0 inches  
 Selected rearmost setting is 0 inches  
 Wheelbase measurement: 188 inches  
 Overhang measurement: 100 inches



## FRAME LAYOUT

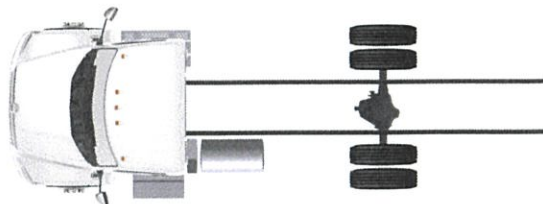


**Note:** Optional content may be displayed. The order has not yet received an engineering review. The actual arrangement of components may not be exactly as pictured. Additional changes may be made to the layout by Kenworth. Add a Custom Frame Layout code if an exact layout is required.

**Selected Options** (Wheelbase: 188)


Sales Code	Description	Length	Side
7144060	60 US Gallon D-Shape Rectangular Aluminum BOC	39.1	Left
7722170	Small DEF Tank, 5.5 Gallons.	6.6	Left
6404421	Battery Box: Steel Parallel Module under W/Step,	31	Left

Dtpo: Truck Model: T380 Customer: LIQUID MEASUREMENT & CONTROLS

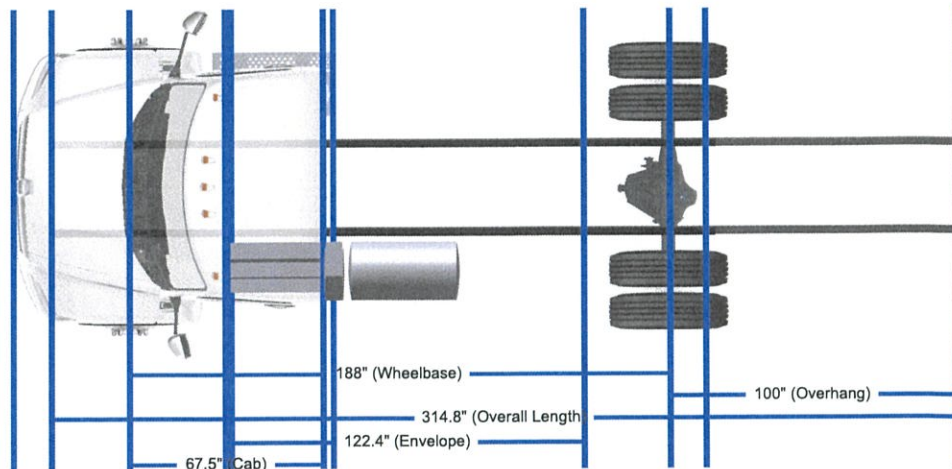


**Note:** Optional content may be displayed. The order has not yet received an engineering review. The actual arrangement of components may not be exactly as pictured.

Additional changes may be made to the layout by Kenworth. Add a Custom Frame Layout code if an exact layout is required.

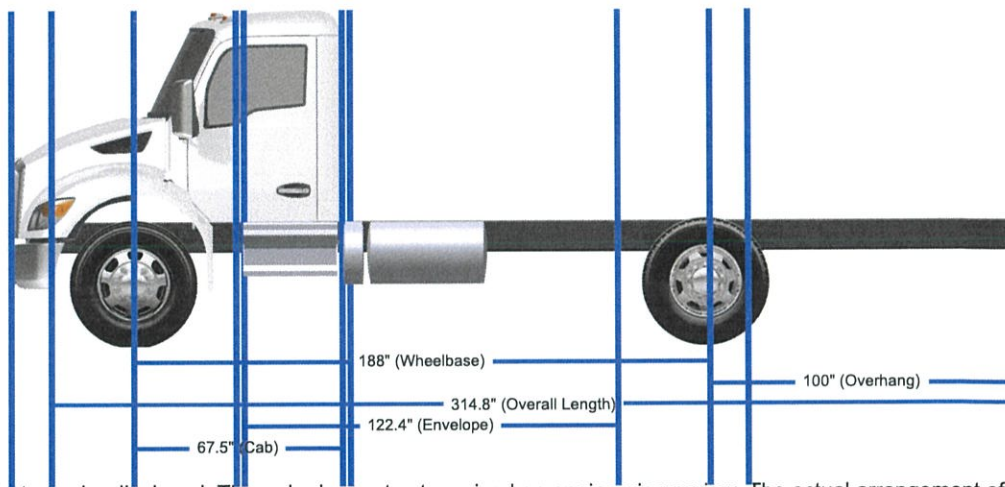

**Note:** Optional content may be displayed. The order has not yet received an engineering review. The actual arrangement of components may not be exactly as pictured.

Additional changes may be made to the layout by Kenworth. Add a Custom Frame Layout code if an exact layout is required.

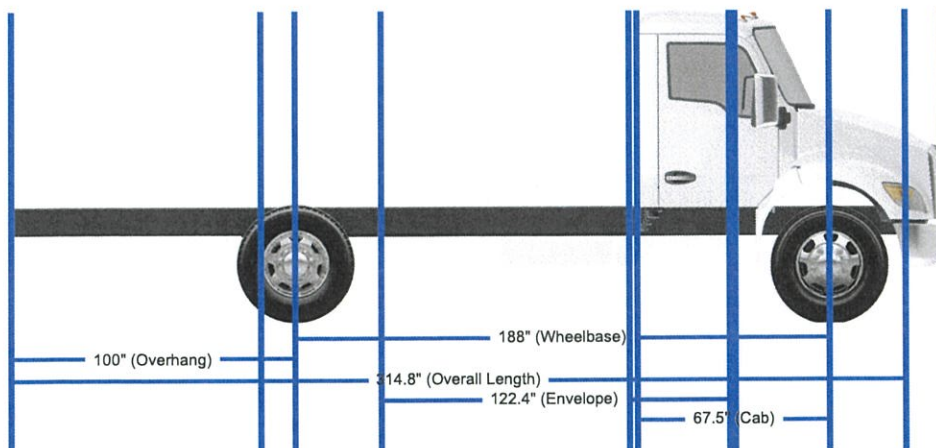

**Note:** Optional content may be displayed. The order has not yet received an engineering review. The actual arrangement of components may not be exactly as pictured.

Dtpo: Additional Model by Customer: the QTY of ASSEMBLY & COINFORMS Layout code if an exact layout is required.

Dtpo: Truck Model: T380 Customer: LIQUID MEASUREMENT & CONTROLS

Selected Options

Sales Option	Description	Width	Side
6404421	Battery Box: Steel Parallel Module u...	18	Left
7722170	Small DEF Tank, 5.5 Gallons.	20.7	Left
7144060	60 US Gallon D-Shape Rectangular ...	20.7	Left

Available Space: Left: 42.7 in. Center: 125.1 in. Right: 87.4 in.

3/14/2024, 2:01:51 PM